



TAS200-AL

SEMI-AUTO STRAPPING MACHINE



An affordable and compact semi-auto strapping machine designed for general packaging use, but built to proven Optimax quality standards.





TAS200-AL

SEMI-AUTO STRAPPING MACHINE

Features include:

- > Optimax-quality engineering at an affordable price
- > Simple use and maintenance
- > Hinged stainless steel top plate
- > External strap tension adjustment
- > Braking swivel castors
- > Adjustable table height
- > Reliable, energy efficient operation



PP Suitable for use with polypropylene strapping

15-45Kg Strapping tension range

3 secs Strapping speed/ cycle rate

240V 50Hz Power requirements

Heat weld seal - no need for metal seals

Adjustable table height

Suitable for carton strapping applications

Suitable for engineering industry applications


85Kg Total machine weight



The TAS200-AL employs a reliable mechanical sealing head

Specifications

Machine Weight:	85 kg
Machine Dims w x d x h (mm):	850 x 560 x 780
Table height:	780-930mm
Max Package Weight:	120 kg
Strap Widths (mm):	9-16
Min/Max PP Thickness:	0.5mm - 0.75mm
Min/Max Tension:	15-45 kg (Strap Dependent)
Speed/Cycle:	3 secs (@50Hz if applicable)
Power Requirement:	240v 50Hz

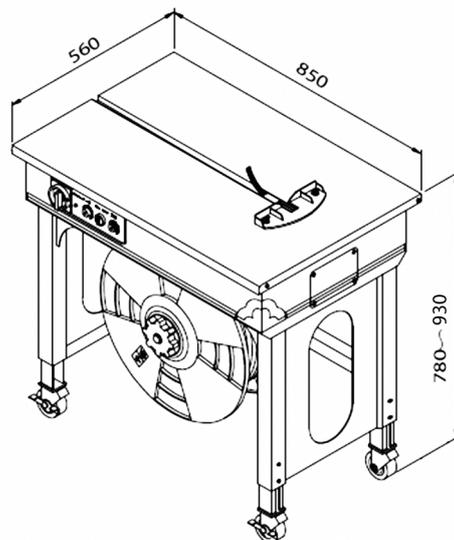

For more information on the complete range of Optimax® packaging products, please contact your authorised Optimax® distributor or visit:

www.optimax.eu.com

© Packaging Brands Ltd 2018
Optimax® is a registered trademark of Packaging Brands Ltd.
We reserve the right to change product specifications without prior notice.
Re-order Code: LIT-PSF013

