

# TRS600-12

## AUTOMATIC STRAPPING MACHINE



High-volume carton and package strapping machine with hands-free operation for maximum productivity, available in a selection of arch sizes.



# TRS600-12

## AUTOMATIC STRAPPING MACHINE

### Features include:

- > External manual strap tension adjustment
- > Activation by foot pedal, console button or ball switch
- > Short-feed sensor to prevent strap misfeed
- > Reliable control head construction



**PP** Suitable for use with polypropylene strapping

**10-70Kg** Strapping tension range

**2.6 secs** Strapping speed/ cycle rate

**240V 50Hz** Power requirements


**Heat weld seal** - no need for metal seals

**Adjustable leg/ table height**

**Suitable for carton strapping applications**

**Suitable for engineering industry applications**


**220Kg** Total machine weight



The TRS600 employs a reliable mechanical sealing head



Footpedal activation




Manual strap tension control

### Specifications

Machine Weight:	220 kg
Machine Dims w x d x h (mm):	1430 x 620 x 1540
Max Package Weight:	100 kg
Strap Widths (mm):	9-16
Min/Max PP Thickness:	0.55mm - 0.75mm
Min/Max Tension:	10-70 kg (Strap Dependent)
Speed/Cycle:	2.6 secs (@50Hz if applicable)
Power Requirement:	240v 50Hz
Power Consumption:	1.2kw

### Options

- > Short feed sensor
- > Stainless steel frame

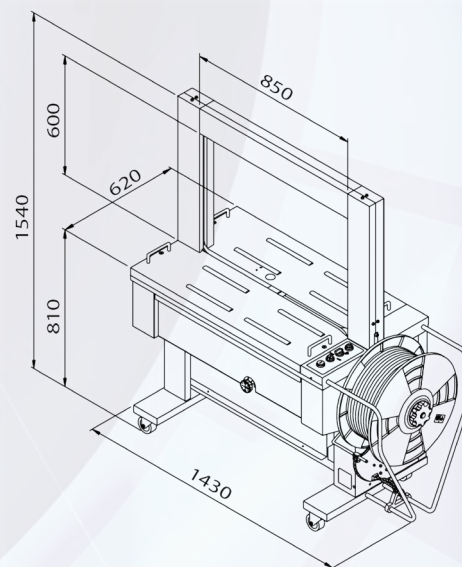

For more information on the complete range of Optimax® packaging products, please contact your authorised Optimax® distributor or visit:

[www.optimaxproducts.com](http://www.optimaxproducts.com)

©Copyright Optimax 2015  
We reserve the right to change product specifications without prior notice  
Re-order Code: LIT-PS007