

Optimax® Heat Shrink Chambers

SC346

HEAT SHRINK CHAMBER

Features include:

- > Best-selling model in range
- > Seal and shrink in one operation
- > Very low energy consumption
- > Advanced electronic controls
- > 240V single phase – will run off a standard 13A socket

Specifications

Power supply:	220/230/240V, 50/60Hz, 13A
Max. power consumption:	3.2kW
Effective power consumption:	1.3-1.9kW
Sealing dimensions:	320 x 460mm (D x L)
Max. height of package:	120mm
Machine dimensions:	1120 x 660 x 550mm (L x W x H)
Max. dimensions of film roll:	400mm x Ø250mm



SC455

HEAT SHRINK CHAMBER

Features include:

- > Seal and shrink in one operation
- > Very low energy consumption
- > Advanced electronic controls
- > 240V single phase – requires a minimum 16A power supply, will not run off a 13A socket.
- > Requires 16A supply and connector (not included)

Specifications

Power supply:	220/230/240V, 50/60Hz, 16A
Max. power consumption:	3.77kW
Effective power consumption:	1.6-2.3kW
Sealing dimensions:	420 x 550mm (D x L)
Max. height of package:	250mm
Machine dimensions:	1320 x 820 x 645mm (L x W x H)
Max. dimensions of film roll:	600mm x Ø250mm



SC680

HEAT SHRINK CHAMBER

Features include:

- > Powerful, high-capacity model
- > Seal and shrink in one operation
- > Very low energy consumption
- > Advanced electronic controls
- > 415V 3 Phase 16amp supply required

Specifications

Power supply:	380/400/415V, 50/60Hz 16A
Max. power consumption:	5.3kW
Effective power consumption:	2.3-3.4kW
Sealing dimensions:	620 x 800mm (D x L)
Max. height of package:	250mm
Machine dimensions:	1575 x 1020mm x 645mm (L x W x H)
Max. dimensions of film roll:	800mm x Ø250mm



ST455


COMBINED L-SEALER /SHRINK TUNNEL

Features include:

- > Separate sealer and shrink tunnel for faster throughput
- > Powerful, high-capacity heat sealing
- > Extendable weld cooling time
- > The ST455 requires a 3.5 to 4.5kg/cm² compressed air supply.
Please contact our technical service centre for more information.
- > 400V 16amp supply required

Specifications

Power supply:	400V, 50Hz, 16A
Max. power consumption:	9kW
Sealing dimensions:	400 x 550mm (D x L)
Tunnel inlet dimensions:	400 x 200mm (W x H)
Working plate height:	900mm
Max. packing height:	150mm
Machine dimensions:	2570 x 870 x 1600mm (L x W x H)
Max. dimensions of film roll:	600mm x Ø300mm

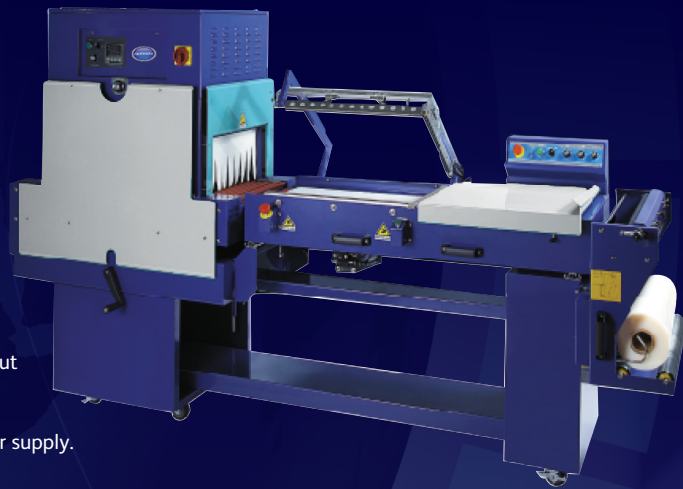

Variable
temperature
control



Simple to
operate control
panel



For more information on the complete range of Optimax® packaging products, please contact your authorised Optimax® distributor or visit:

www.optimaxproducts.com

©Copyright Optimax 2017
We reserve the right to change product specifications without prior notice
Re-order Code: LIT-PSR019
Optimax® is a registered trademark of Packaging Brands Ltd